

# PF SERIES

## GLASS DOOR LOCKS



PF210  
PASSAGE



SILENT LATCH



PF251  
ENTRY (KIK CYLINDER)



PF251P  
PROFILE CYLINDER

**Warranty** • 1 Year limited warranty

**Panel Thickness** • For tempered glass panels  
•  $\frac{5}{16}$ – $\frac{1}{2}$ " (8–12.7 mm) thick  
•  $\frac{19}{32}$ " (15 mm) extension kit (#PF2-EXT)

**Handing** • Handed, field reversible\*  
*(\*) Handing conversion is possible only from LH to RH or LHR to RHR (and vice versa). See handing guide.*

**Spring Latch** • Stainless steel,  $\frac{1}{2}$ " (12.7 mm) throw  
• Derlin stripe for silent/smooth operation

**Strike** • ASA strike – available  
• Metal frame strike – available  
• Glass panel strike – available

*Strikes not included, sold separately. See Parts & Accessories*

**Trim** • High strength zinc-alloy body  
• Stainless steel covers

*Levers not included, sold separately. See Parts & Accessories*

**Chassis** • Concealed mounting  
• Shims and gaskets included

**Preparation** • Glass cut-out required. See installation instructions for details

**Cylinder** • 5-pin KIK cylinder  
• Schlage "C" keyway, 2 keys  
• Removable, rekeyable  
*Other keyways and keying options available.*

**Functions** 200 Glass panel strike  
210 Passage  
251 Entry  
251P Entry, profile cylinder (less core)

**Levers** • Wide variety of lever styles  
• Sold separately – see Parts & Accessories

**Finish** 630–Satin stainless steel  
19–Matte black\*

*(\*) Special order. Other finishes also available by special order*

PF	251	LH	–	630
SERIES	FUNCTION <sup>(1)</sup>	HAND		FINISH


(1) SEE SELECTION CHART FOR DETAILS

(2) LH: LEFT RH: RIGHT LHR: LEFT, REVERSED RHR: RIGHT, REVERSED

## SELECTION GUIDE

SERIES	FUNCTION / DESCRIPTION	FINISH <sup>1</sup>	/ CASE
PF	210 Passage	630, 19*	20
PF	251 Entry, KIK cylinder included ➡	630, 19*	20
PF	251P Entry, profile cylinder (less core) ➡	630, 19*	20
PF	200 Strike for glass side panel	630, 19*	**

(1) OTHER FINISHES AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED. (\*) SPECIAL ORDER, MAY REQUIRE ADDITIONAL DELIVERY TIME  
 (\*\*) CONTACT LOCAL REPRESENTATIVE FOR DETAILS. ➡ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

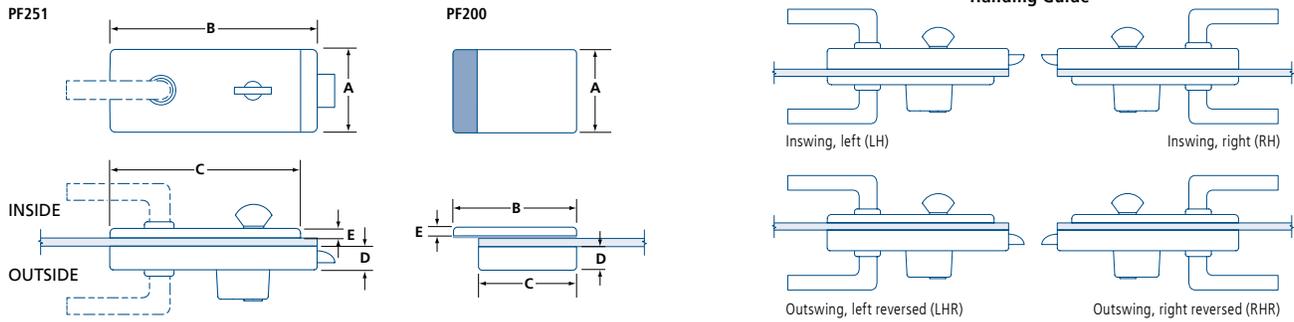

	A	B	C	D	E
<b>PF210</b> <b>PF251</b>	2 <sup>5</sup> / <sub>8</sub> (67)	6 <sup>1</sup> / <sub>2</sub> (165)	5 <sup>7</sup> / <sub>8</sub> (150)	7 <sup>7</sup> / <sub>8</sub> (22)	5 <sup>5</sup> / <sub>16</sub> (8)
<b>PF200</b>	2 <sup>5</sup> / <sub>8</sub> (67)	3 (76)	2 <sup>3</sup> / <sub>8</sub> (60)	7 <sup>7</sup> / <sub>8</sub> (22)	5 <sup>5</sup> / <sub>16</sub> (8)

IN (MM)

## PARTS & ACCESSORIES

Additional lever styles available by special order - see Architectural Lever Styles.  
 Please contact your local sales representative for details.



**PFL001-32D**  
Straight lever style (sold in pairs).



**PFL018-32D**  
Curved lever style (sold in pairs).



**CBPT1530-SCKD-15**  
Schlage "C" keyway profile cylinder with thumb-turn. For LH/RH PF251P locks.



**CBPT3131-SCKD-15**  
Schlage "C" keyway profile cylinder with thumb-turn. For LHR/RHR PF251P lock.



**9203**  
Viro profile cylinder, brass plated. Required for master key systems with PF251P.



**ASAC15**  
ASA strike for 1<sup>3</sup>/<sub>4</sub>" to 2" (44.5 mm to 50 mm) door frame. 1<sup>1</sup>/<sub>4</sub>" x 4<sup>7</sup>/<sub>8</sub>" (32 x 124 mm)



**PF2-EXT**  
Extension kit for panel thicknesses up to 1<sup>9</sup>/<sub>32</sub>" (15 mm). For PF210 or PF251.



**PF200**  
Patch fitting lock strike for glass side panel up to 1<sup>9</sup>/<sub>32</sub>" (15 mm) thick.

